



SMBH 50/50


Manipolatore con braccio orizzontale (a richiesta braccio fisso);
versioni con base fissa o motorizzata. Scorrevole su binari. Grande rigidità
strutturale per garantire una flessione minima del braccio.

Column and boom positioner with horizontal sliding boom (fixed boom on
request); the base can be either fixed or powered and travelling on rails.
Rigid structure for minor deflection.

Manipulateur à bras glissant horizontalement (à la demande statique);
version avec embase fixe ou actionnée par moteur coulissante sur glissière.
Grande rigidité de la structure pour garantir une flexion minimum du bras.

Schweißnahtvorrichtung mit horizontaler Verstellung des Arms (auf Anfrage
mit festen Arm); Ausführung mit festen oder mit Motor getriebenen Grundplatte
gleitend auf Schiene.
Große Festigkeit des Gestells zur Gewährleistung einer präzisen Armführung.

Manipuladore con deslizamiento brazo horizontal (a petición con brazo fijo); versión con base fija o desplazada por
motor corrediza sobre railes. Gran rigidez estructural para garantizar una flexión minima del brazo.

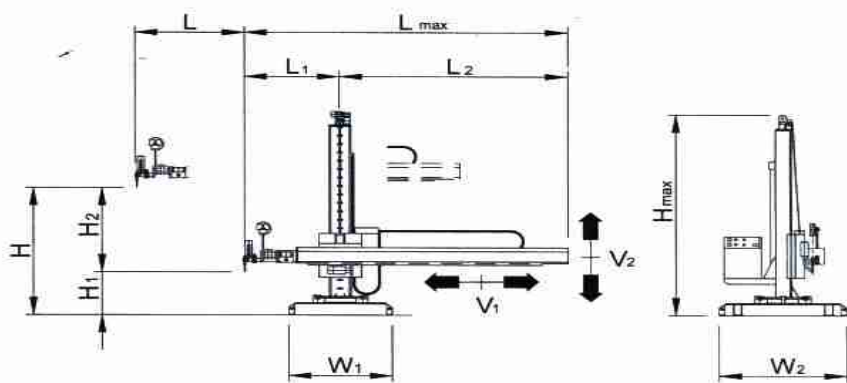

SMBH 50/50
H2 mm = 5000
L mm = 5000
V1 m/min = 0.12-1.2
V2 m/min = 1.0
H1 mm = 400
H mm = 5200
H max mm = 6000
W1 mm = 2000
W2 mm = 2000
Volt = 3x400
Volt = 24
Kg = 8400

ITEM	DESCRIPTION	PRICE CHF
SMBH 50/50	Vertical and horizontal boom travel (mm); 5000x5000	Stationary version: 172140.00 Mobile base version, adj. speed: 202540.00
SROT	Set of two rails for mobile base version; price per meter	1425.00
SLS10	Powered slide stroke 100 mm. (3,9"), with joystick control	7790.00
SLS15	Powered slide stroke 150 mm. (5,9"), with joystick control	8170.00
SLS30	Powered slide stroke 300 mm. (11,8"), with joystick control	9310.00
SLC15/15	Set of powered cross slide stroke 150x150 mm. (5,9" x5,9"), with joystick control	15865.00
SLC15/30	Set of powered cross slide stroke 150x300 mm. (5,9" x11,8"), with joystick control	17005.00
SLC30/30	Set of powered cross slide stroke 150x150 mm. (11,8" x11,8"), with joystick control	18145.00

Common characteristics of stationary version:

Powered up/down movement; powered horizontal boom; electric control panel.

Common characteristics of Mobile base version:

Powered up/down movement; powered horizontal boom; powered base with adjustable speed; electric control panel.