



SPS 150 S


Posizionatore a tavola rotante portata 150 Kg. Rotazione con motore auto frenante a corrente continua, riduttore a vite senza fine e ralla a sfere. Inclinazione manuale.

Turntable type positioner maximum load 150 Kg. Slewing by DC selfbraking motor through worm and ball slewing ring. Tilt: manual.

Positionneur à table rotative portée 150 Kg. Rotation avec moteur auto-entretenu à courant continu, réducteur à vis sans fin et butée à billes. Inclinaison manuelle.

Drehtisch – Positioner vorrichtungen Tragkraft 150Kg.
Rotation mit selbstbremsenden Gleichstrommotor,
Endlosschneckenuntersetzung und Kugelscheibe. Schwenkung
manuell .

Posicionadores de mesa giratoria portal 150 Kg. Rotación por motor freno de corriente continua, reductor de tornillo sin fin y rangua de bolas.
Inclinación manual .

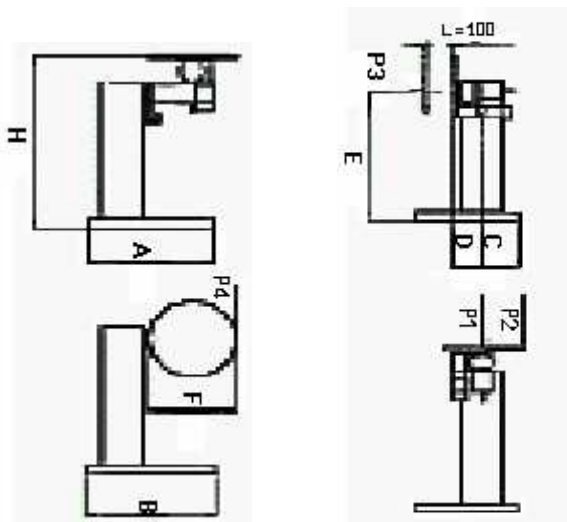

SPS 150 S
A = 700
B = 700
C = 200
F diam mm = 500
E = 730
D = 200
H = 910
Volt = 220
RPM = 0,5 – 9
P1 Kg = 150
P2 Kg = 80
Mf Kgm = 10
P3 Kg = 110
P4 Kg = 45
Mt Kgm = 10
PESO Kg/Weight = 100

ITEM	DESCRIPTION	PRICE CHF
SPS 150 S	Turntable positioner for bench use. Manual tilt. With pedal	6840.00
BPT 300 M	Pneumatically actuated torch arm for MIG welding	2945.00
BPT 300 T	Pneumatically actuated torch arm for TIG welding	3705.00

ACCESSORIES

SPS/TT	Table delayed start device for TIG welding	798.00
SPS/SCH	Hi-frequency shielding	570.00
SPS/ML	Display LCD	608.00
SP/TF	Crater filler device for TIG/WIG welding	912.00
CTP	Pneumatically actuated tail stock	2622.00

LEGEND

SPS	Turntable positioner, standard version
SPS ... S	Turntable positioner with overwelding function and single control for slewing and welding power source start
SPS ... HC	Turntable positioner with 100 mm. hollow centre turntable
SPS ... S HC	Turntable positioner with overwelding function, single control for slewing & welding power source start and hollow centre turntable

Packaging : wooden crate surcharge CHF 42.00 net