



# STL 4000

Posizionatore a tornio per lunghezza 4000 mm e diametro da 100 a 900 mm. Basamento e guide in acciaio. Contropunta ad azionamento pneumatico. Tavola azionata da motore a corrente continua con riduttore .


Welding lathes 4000 mm length and diameter from 100 to 900 mm. Steel frame and tracks. Pneumatically operated tail stock. Table Driven by DC motor and gearbox.

Positionneurs à tour pour des longueurs 4000 mm et diamètres de 100 à 900 mm. Embase et glissières en acier. Contre-pointe à actionnement pneumatique. Table actionnée par un moteur à courant continu avec réducteur.



Rundnahtschweißvorrichtung für Längen 4000 mm und Durchmesser von 100 bis 900 mm. Unterbau und Führungen aus Stahl. Reitstock mit pneumatischer Betätigung. Tisch angetrieben von Gleichstrom-Elektromotor mit Untersetzung.

Posicionadores de torno para largos 4000 mm y diámetros de 100 a 900 mm. Bancada y orrenderas en acero. Contrapunta de accionamiento neumático. Mesa accionada por motor de corriente continua con reductor.

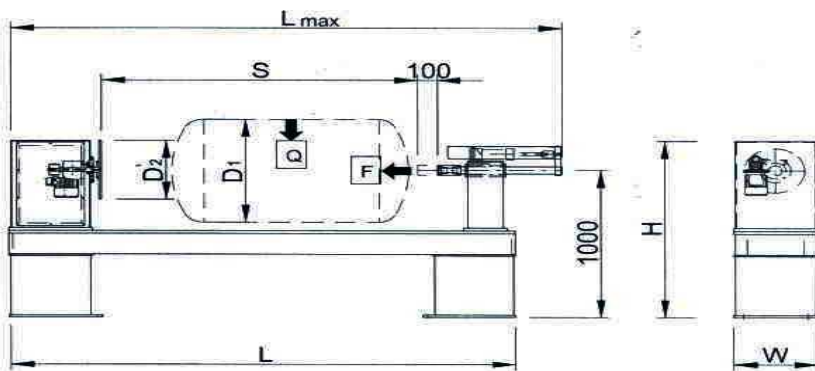

STL 4000
D1 mm = 900
S mm = 0-4000
Q kg = 200
D2 mm = 400
F kg = 100
Rpm= 1.6-16
Lmax mm = 5300
H mm = 1400
W mm = 420
Volt = 1x230
Volt = 24
LxWxH mm = 5000x420x1400
Kg = 725

ITEM	DESCRIPTION	PRICE CHF
STL 4000	Precision welding lathe; working length 500 mm.; max diameter 900 mm.	44460.00
STL/TMVE	Remote control start-stop; speed adj.; emergence.	342.00
STL/PMA	Single pedal control (start-stop).	228.00
STL/CWK	Cold wire feed kit for Tig and Plasma welding. Composition: Wire feed motor; wire positioning slide with 4 axis adjustment; electric circuit board side of the machine (included in general control panel of the positioner); consolle with potentiometers for adjustment of: table rotation starting delay, wire speed, cold wire stop delay, wire retract length, welding machine switching delay, crater filler.	8740.00
PTL 200	Pneumatically actuated torch arm	5700.00
BPT 300 M	Pneumatically actuated torch arm for Mig welding	1550.00
BPT 300 T	Pneumatically actuated torch arm for Tig welding	2945.00
HVS	Arc length control	18430.00
OEL 150	Electronic oscillator	19380.00

I due bracci portatorcia della foto, sono disponibili solo come optionals

The two torch holders in the picture, are available on request only

Les deux bras porte-torche de la photo, sont en option seulement

Die abgebildeten Brennerhalterung (photo), sind nur als Sonderausstattung erhältlich

Los dos brazos porta-antorcha (fotografia), están disponibles sólo como opción